



Introducing the third generation of the proven EcoMod® Series

Expertly engineered with durable, marine grade components and various optic options

Numerous bracket options to easily retrofit to existing hole patterns

Custom designed, high temperature optics improve safety, increase efficiency and maximize operator comfort

Key Applications

- Ship-to-Shore (STS) cranes
- Rubber Tired Gantry (RTG) cranes
- Mobile harbor cranes (MHC)
- Interior and exterior uplighting
- Facility and perimeter lighting
- Deck flood lighting
- Airport hangars
- Overhead cranes
- Bridges and parking lots
- Aft wheelhouse lighting
- Vessel perimeter lighting

Compliances

ETL/cETL Certified to:

- UL 1598 Suitable for Wet Locations
- UL 1598A Marine Outside Type (Saltwater)
- CSA C22.2 No. 250.0

CE

IP66, IP67 and IP69K

ABS

DLC (contact factory)

LM79 and LM80 reports available

FCC Part 15, Subpart B, Class A standards for conducted and radiated emissions.

Buy American Act (BAA)

Build America Buy America Act (BABA)

Specifications

Construction	Marine grade, powder coated cast aluminum housing Adjustable powder coated steel mounting harp
Finish	Black thermoset powder coat 2-step finish

Specifications

Hardware	Marine grade (316) stainless steel
Lens	Clear, tempered glass
Surge protection	20kV (20kA)
Light source	Up to 15,000 lumens, 121W (LO); 30,000 lumens, 231W (HI); 52,500 lumens, 438W (MAX) Cool white 5000K (50K), neutral white 4000K (40K), warm white 2700K (27K) LED options CRI > 70 50,000 hour rated life
Power source	120-277V, 50-60Hz; 277-480V, 50-60Hz Overload, over-voltage, over-temperature and short-circuit protection 0-10V dimming option (DIM)
Wiring	Stranded wires 17 gauge, 3 conductor cord - 72.00 inch (1829 mm) with pigtail - standard Through wire optional (TW) (no cord provided) Standard cord grip 0.37 inch - 0.50 inch (9.5 mm - 12.7 mm)
Ambient operating temperature	-40°C to + 60°C (LO & HI models) -40°C to + 50°C (MAX model)
Mounting	Indexed aiming and lockable in 5° increments Alternative brackets to match legacy hole patterns (B1 and B2) Boom mount kit and tenon mount kit accessories (sold separately)
Vibration	6G at resonant frequency
Weight	LO - 31.0 lb (14.1 kg) HI - 39.6 lb (18.0 kg) MAX - 49.2 lb (22.3 kg)
Safety cable	Safety cable included
Warranty	5 years



This product complies with domestic preference requirements such as BABA. For additional information, visit phoenixlighting.com or consult your representative.



This product complies with domestic preference requirements such as BAA or TAA. For additional information, visit phoenixlighting.com or consult your representative.


EcoMod® 3 Series

Heavy Duty LED Floodlight


PHOENIX®
DURABILITY X DESIGN™

Dimensions (Standard Mounting Brackets)





LO Model

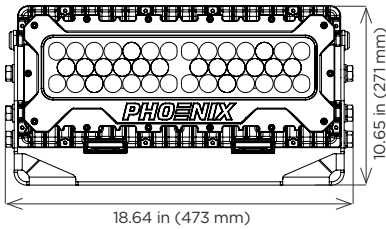


HI Model

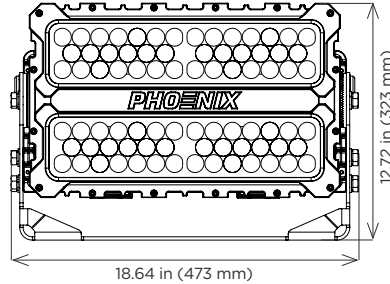


MAX Model

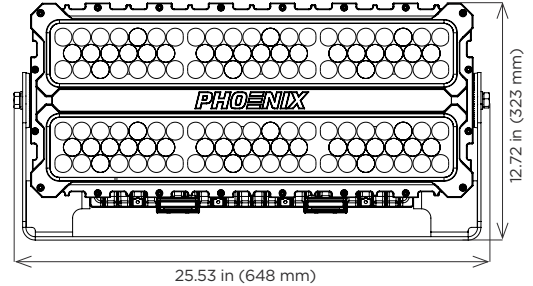

LO & HI Model


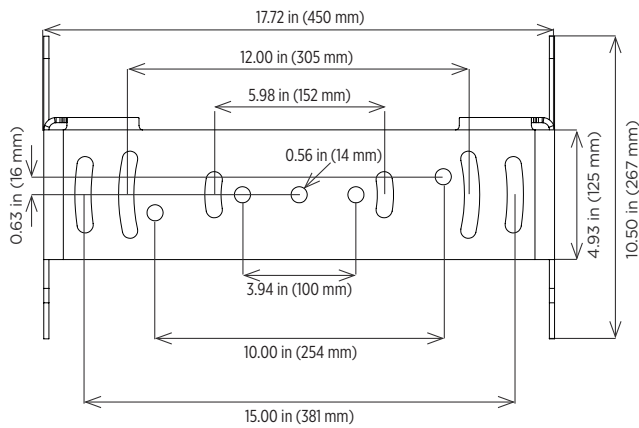


MAX Model


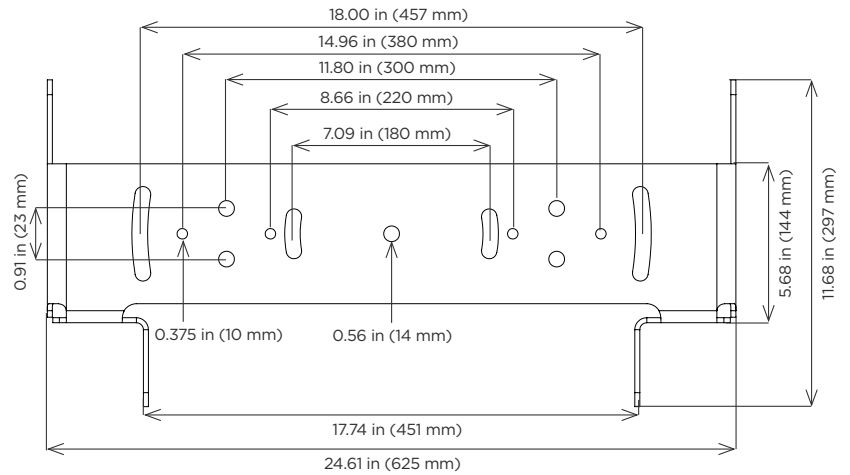


Dimensions (Alternative Brackets B1 & B2)


LO Model (B1)

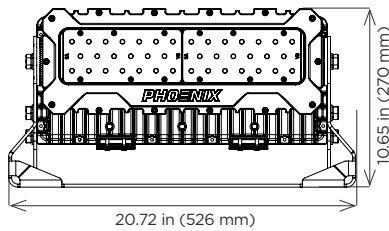


LO Model (B2)

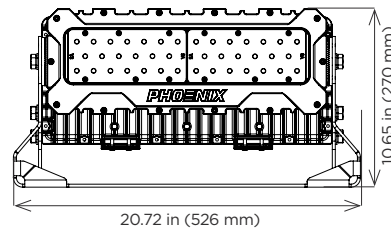

LO Model (B1)

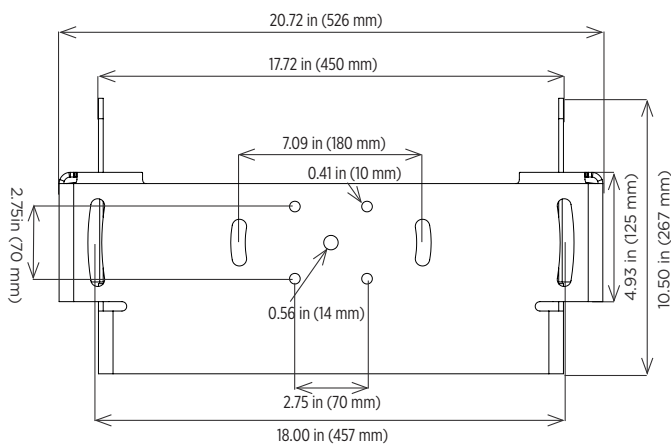

LO Model (B2)

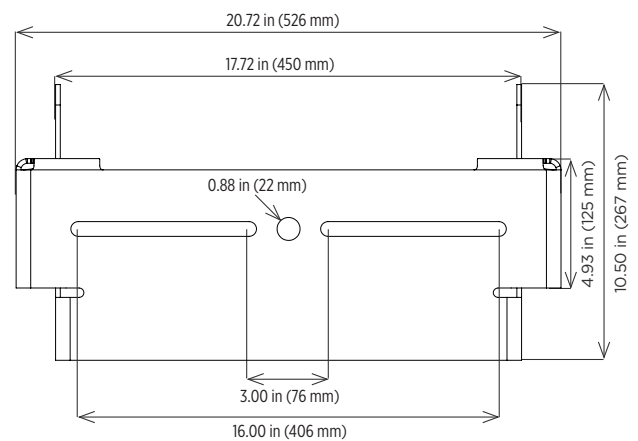



EcoMod® 3 Series

Heavy Duty LED Floodlight



PHOENIX®
DURABILITY X DESIGN™

Dimensions (Alternative Brackets B1 & B2)


HI Model (B1)

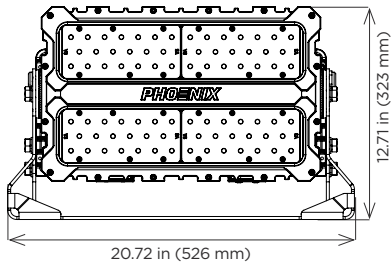



HI Model (B2)

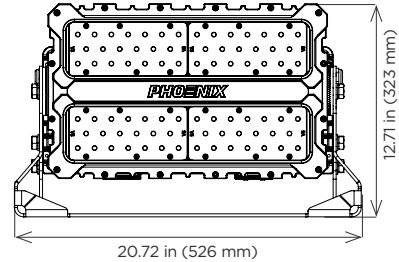

HI Model (B1)

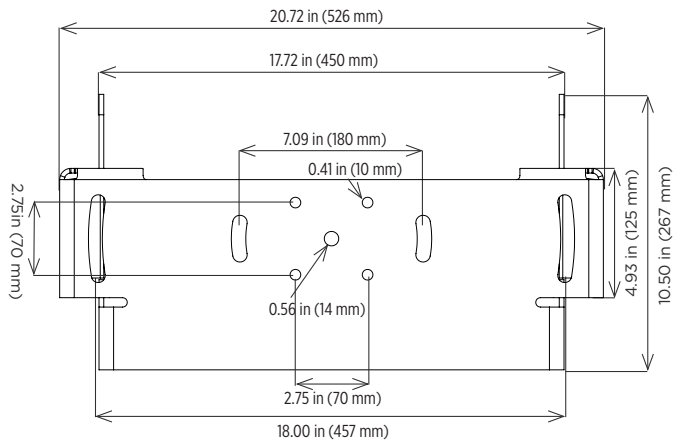

HI Model (B2)

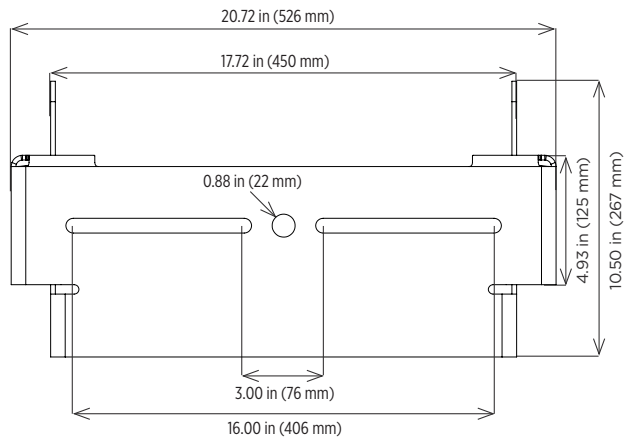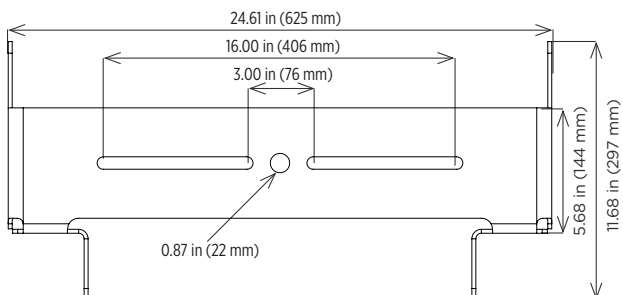MAX Model (B1)¹

Notes

- 1 EM3-MAX-B1 height and width are same as the standard EM3-MAX.

Ordering Information

Example: EM3-HI-MF-120-277-50K-DIM

Fixture	Model	Optic	Voltage	Color Temperature	Options	Alternative Brackets
EM3	LO	WF	120-277	50K	DIM ²	B1
	HI	MF	277-480	40K ¹	TW ²	B2 ³
	MAX	WS		27K ¹		
		SP				
		NS				
		VS				
		NG				

Model

LO up to 15,000 lumens, 121W
HI up to 30,000 lumens, 231W
MAX up to 52,500 lumens, 438W

Optic

WF Wide flood
MF Medium flood
WS Wide spot
SP Spot
NS Narrow spot
VS Very narrow spot
NG No-glare/perimeter

Voltage

120-277 120-277V, 50-60Hz
277-480 277-480V, 50-60Hz

Color Temperature

50K Cool white 5000K LEDs
40K¹ Neutral white 4000K LEDs
27K¹ Warm white 2700K LEDs

Options

DIM² Dimmable (0-10V)
TW² Through wire

Alternative Brackets

B1 Alternative bracket 1
B2³ Alternative bracket 2

Notes

- 1 Contact factory for availability/more information
- 2 DIM & TW are not available together
- 3 B2 bracket only available on LO and HI models

EcoMod® 3 Series


Heavy Duty LED Floodlight




Optics Chart

Optic	Description	Nema	Field Spread	HWHM
WF	Wide Flood	7H X 6V	113.6°V x 138.6°H	33°
MF	Medium Flood	5H X 5V	84.9°V X 88.5°H	22°
WS	Wide Spot	5H X 5V	67.0°V x 68.4°H	15°
SP	Spot	4H X 4V	54.2°Vx 55.5°H	12°
VS	Very Narrow Spot	2H X 2V	24.3°V X 24.8°H	7°
NG	No Glare Perimeter	5H X 4V	59.7°V X 74.6°H	32°

Accessories (order separately)



Boom Mount Kit
BMK-LO/HI/MAX



2 ¾ inch Tenon Mount
PTM-LO/HI (LO & HI models only)
PTM-MAX (MAX models only)